

KUKA



KUKA Automotive Solutions

KS ROBOT PEDESTAL



■ **KS ROBOT PEDESTAL**

KS ROBOT PEDESTALS ARE USED WHERE ROBOTS HAVE TO BE ADAPTED TO A DIFFERENT WORKING HEIGHT FOR THE GIVEN APPLICATION

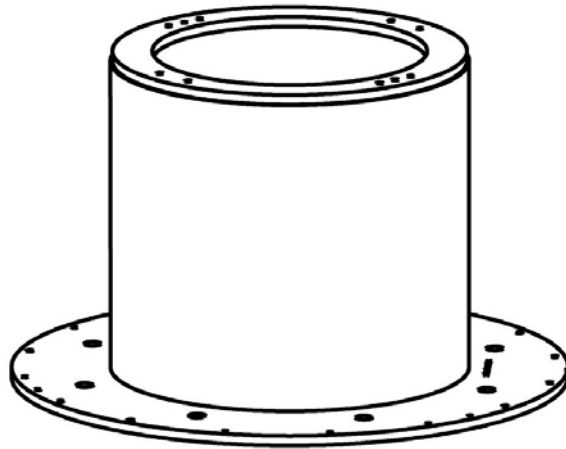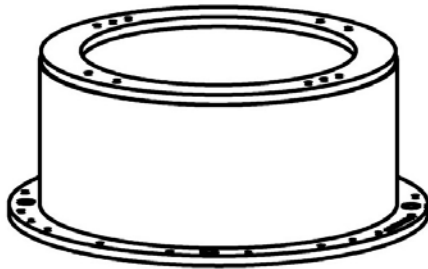

CHARACTERISTICS

- FEM optimized design
- Fewer interference contours due to rounded shape

FASTENING METHODS

- Attachment to a concrete floor by means of anchors
- Screw-fastening to a steel structure

THE KS ROBOT PEDESTALS ARE AVAILABLE FOR THE FOLLOWING ROBOT TYPES:

KR60P/2, KR100P/2, KR100PA, KR100-2P, KR350, KR360, KR500	Type A	Height: 30 mm - 2000 mm
KR150, KR150-2, KR150K, KR1502-K, KR150W	Type B	Height: 30 mm - 2500 mm
KR180, KR180K, KR180PA	Type B	Height: 30 mm - 2500 mm
KR210, KR210-2, KR240-2	Type B	Height: 30 mm - 2500 mm
KR Serie comp: KR100 comp, KR140 comp, KR200 comp	Type B	Height: 30 mm - 2500 mm
KR30K, KR60K, KR100-2PA, KR120, KR180	Type B	Height: 30 mm - 2500 mm
KR30L16, KR30-3, KR30HA, KR40PA, KR60-3, KR60HA	Type C	Height: 30 mm - 2500 mm
KR6, KR6KS, KR6ARC, KR15SL, KR16	Type D	Height: 30 mm - 2000 mm
KR6/2, KR15/2	Type E	Height: 30 mm - 2000 mm
KR30-3 KS, KR45/2, KR60/2, KR125/3, KR150/3, KR200/3	Type F	Height: 30 mm - 2500 mm

Specifications regarding the quality and usability of the products do not constitute a warranty of properties. They are intended to serve informative purposes only. Solely the respective contract of sale shall be binding in respect of the extent of our supplies and services.

For more details contact us at standard@kuka.de or call + 49 821 797-1757.

KUKA Systems GmbH

Bluecherstrasse 144 | 86165 Augsburg | Germany
 Tel. + 49 821 797-0 | Fax + 49 821 797-1991
info@kuka.de | www.kuka-systems.com

International

Benelux | Brazil | China | France | Germany | India
 Mexico | Norway | Russia | Slovakia | Sweden | UK | USA

KUKA