


KUKA

KUKA Automotive Solutions

KS RACK CHANGER



■ **KS RACK CHANGER**

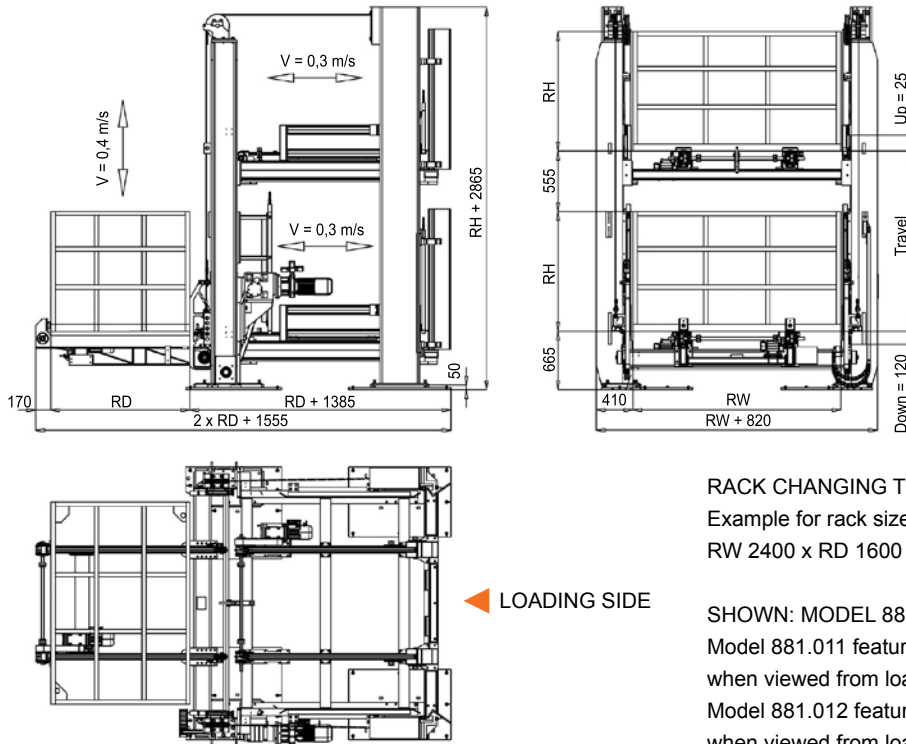

RACK CHANGING TIME
 Example for rack size
 RW 2400 x RD 1600 x RH 1500 is 35 sec.

SHOWN: MODEL 881.011
 Model 881.011 features lifting drive on left
 when viewed from loading side
 Model 881.012 features lifting drive on right
 when viewed from loading side

RACK SIZES*

SELECTION CRITERION	VARIABLE	MINIMUM VALUES	MAXIMUM VALUES	STEPS
Rack width	RW	2000 mm	3800 mm	200 mm
Rack height	RH	1250 mm	2000 mm	250 mm
Rack depth	RD	1200 mm	2000 mm	200 mm

PAYLOAD

- Option A: Payload up to 1200 kg
- Option B: Payload up to 1700 kg

OPTIONS

- Pneumatic rack stop
- Pneumatic load support frame
- Rack positioning support

RACK CHANGER, LIFTING DRIVE SYSTEM

- Model 881.011,
lifting drive on left when viewed from loading side
- Model 881.012,
lifting drive on right when viewed from loading side

* Other dimensions and designs are available on request

Specifications regarding the quality and usability of the products do not constitute a warranty of properties. They are intended to serve informative purposes only. Solely the respective contract of sale shall be binding in respect of the extent of our supplies and services.

For more details contact us at standard@kuka.de or call + 49 821 797-1757.

KUKA Systems GmbH
 Bluecherstrasse 144 | 86165 Augsburg | Germany
 Tel. + 49 821 797-0 | Fax + 49 821 797-1991
 info@kuka.de | www.kuka-systems.com

International
 Benelux | Brazil | China | France | Germany | India
 Mexico | Norway | Russia | Slovakia | Sweden | UK | USA

KUKA