



KUKA

KUKA Standard Products

KS PULLOUT CARRIER

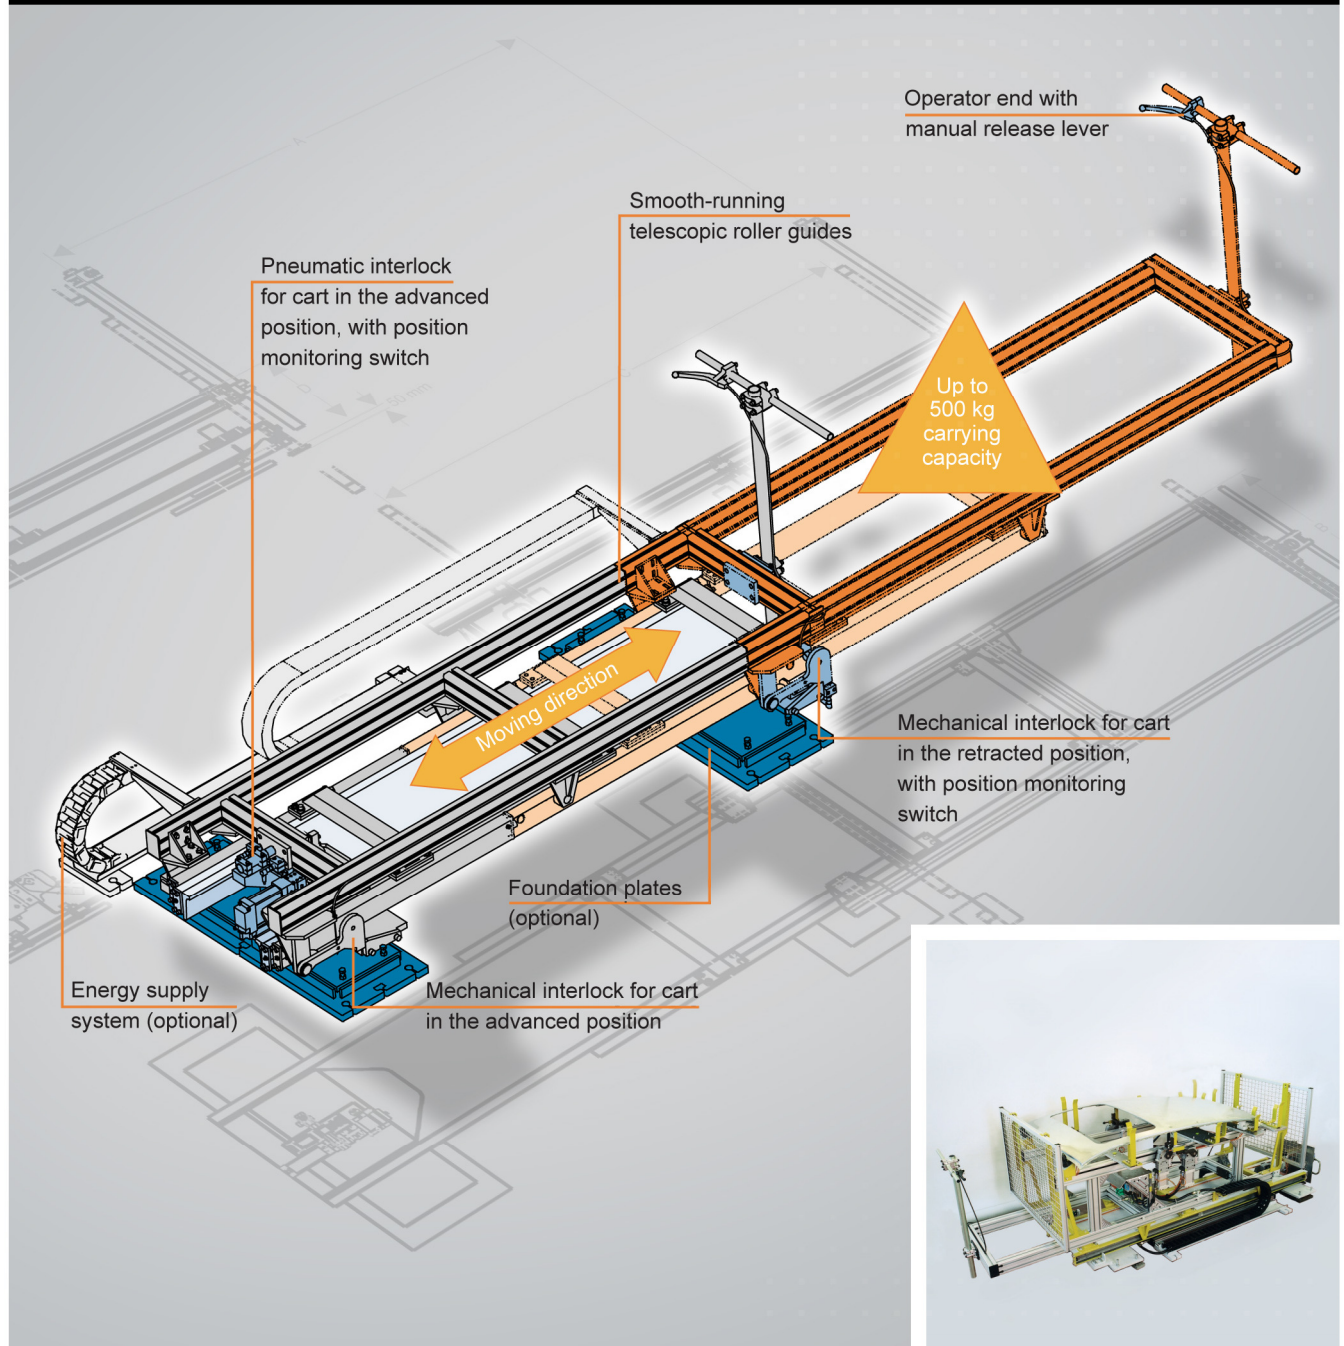


KS PULLOUT CARRIER

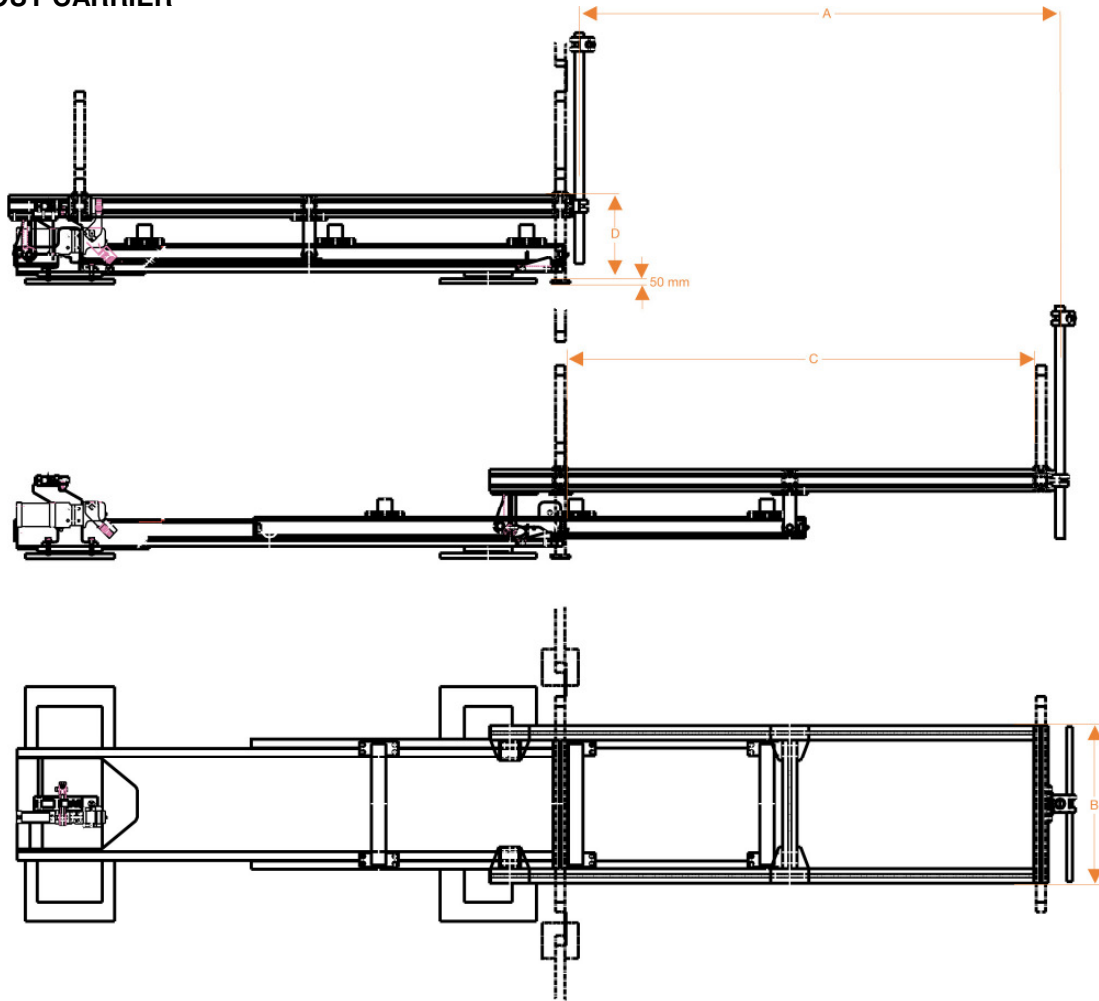

TECHNICAL DATA

- Travel A: 800 - 2400 mm (200 mm steps)
- Cart width B: 660 mm
- Superstructure length C: Travel - 50 mm
- Height D: 328 mm
- Repeatability: +/- 0.5 mm
- Max. carrying capacity:

800 - 2000 mm:	500 kg
for travel: 2200 mm:	400 kg
(200 mm steps) 2400 mm:	300 kg
- Dimensions of tool plate: Length see C, width up to 2500 mm / greater with optional support rollers

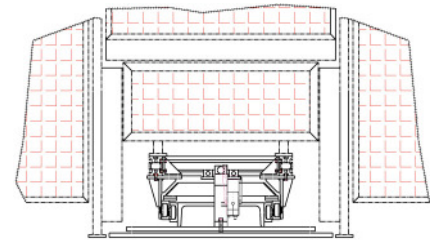

Safety fencing installed by the customer

Specifications regarding the characteristics and usability of the products do not constitute a warranty of properties. They are intended to serve informative purposes only. Some items of equipment depicted in the illustrations are optional, and are not included in the standard scope of supply. Solely the respective contract of sale shall be binding in respect of the extent of our supplies.

KUKA Systems GmbH | Bluecherstrasse 144 | 86165 Augsburg | Germany
Tel. + 49 821 797-0 | Fax + 49 821 797-1991 | info@kuka.de | www.kuka.com

International
Benelux | Brazil | China | France | Germany | India | Mexico | Norway | Russia
Slovakia | South Korea | Sweden | UK | USA

KUKA